




## Room Temperature Sensor **QAA32**

NTC resistor sensing element

### Use

In HVAC plants to acquire the room temperature.

### Functions

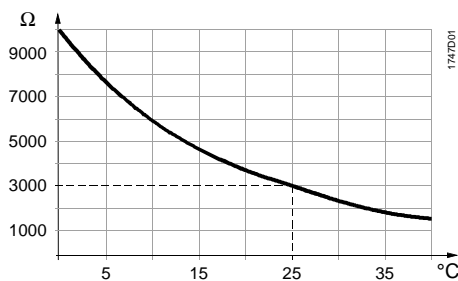

The sensor acquires the room temperature by means of its NTC resistor. The resistance value changes according to the ambient temperature. It is available for further handling by a suitable controller.

### Type summary

Type reference	Description
<b>QAA32</b>	Room temperature sensor
<b>ARG70</b>	Adapter plate 120 x 120 mm for 4" x 4" conduit boxes
<b>ARG70.1</b>	Adapter plate 96 x 120 mm for 2" x 4" conduit boxes

### Mechanical design

The units have been designed for wall mounting. They are suitable for use with most commercially available recessed conduit boxes. The cables can be introduced from the rear (concealed wiring).


## Installation notes

Location	On a flat inner wall of the space to be heated or air conditioned. Not in recesses, shelves, not behind curtains, not opposite or near heat sources. The unit must not be exposed to direct solar radiation.
Notes	<ul style="list-style-type: none"><li>• When installing the unit, fix the baseplate first, then hook on the body and make the electrical connections. Then fit the cover and secure it.</li><li>• The end of the conduit at the sensor must be sealed to prevent false measurements due to draughts through the conduit.</li><li>• The permissible environmental conditions should be observed.</li><li>• Installation instructions are printed on the packing.</li></ul>

## Technical data

General unit data	Operating range	0...40 °C
	Sensing element	NTC resistor, 3 k $\Omega$ at 25 °C
	Measuring tolerance at 25 °C	$\pm$ 0.3 K
	Time constant (with air movement)	approx. 6 min
Connection	Terminals for cross-sectional areas of	2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>
Environmental conditions	Operation	to IEC 721-3-3
	Climatic conditions	class 3K5
	Temperature	0...50 °C
	Humidity	<85 % r. h.
	Pollution degree	normal, to EN 60730
	Transport	to IEC 721-3-2
	Climatic conditions	class 2K3
	Temperature	-25...+65 °C
Humidity	<95 % r. h.	
Requirements	Mechanical conditions	class 2M2
	Safety class	II to EN 60 730
	Degree of protection	IP 30 to EN 60 529
	CE conformity	to EMC directive 89/336/EEC
Miscellaneous	Weight	approx. 0.1 kg
	Colour	white, NCS S 0502-G (RAL 9003)

## Internal diagram



## Dimensions

### Unit and Baseplate

